


GN 8110

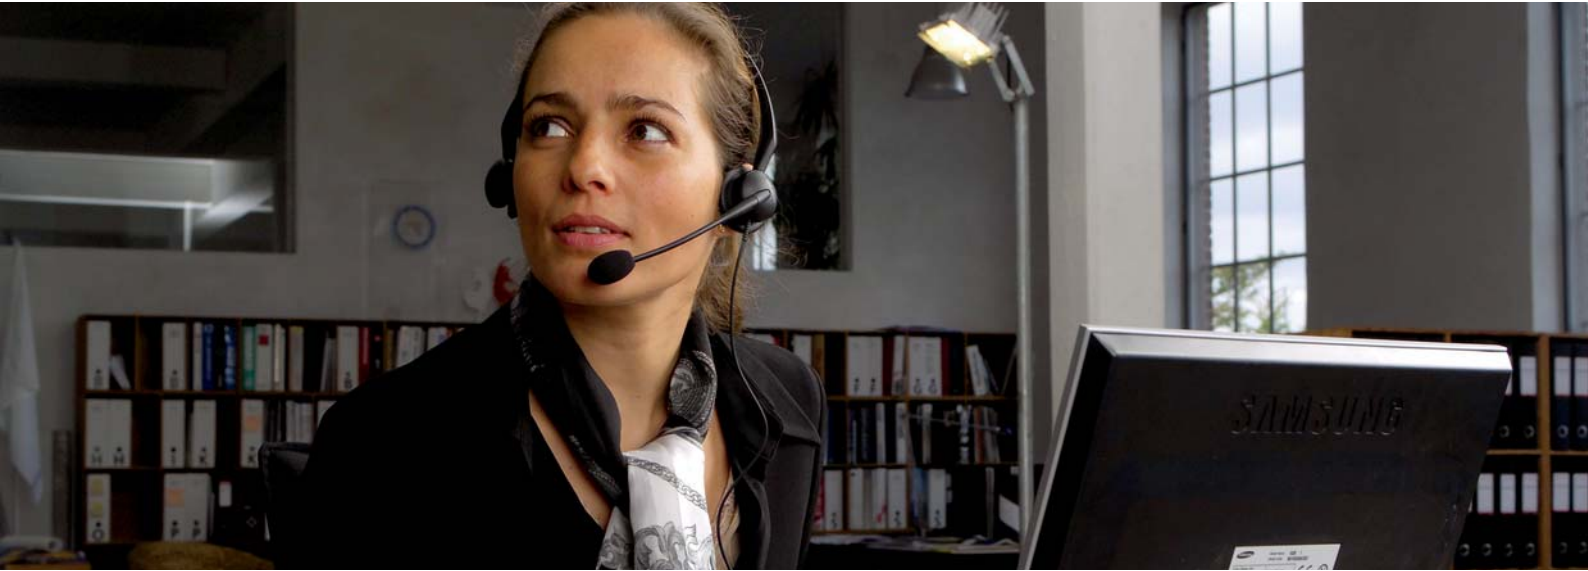

CD-quality sound. Plug-and-play installation.

The GN 8110 adapter dramatically improves the quality of computer-based IP telephony by bypassing your computer's sound card and letting you connect directly to a USB port. This lets you enjoy crisper, cleaner PC sound with your GN Netcom headset.

- Connects headset to PC-based voice applications
- Eliminates sound-card compatibility problems
- Provides distortion-free CD-quality sound
- Certified for use on Windows® operating systems
- Plug-and-play with no software to install
- Connects to any GN Netcom (QD) headset for PC-based IP-telephony

The GN 8110 bridges the gap between your computer and headset. Used with Windows® operating systems as well as Mac operating systems 9.0.4 or greater, the GN 8110 provides distortion-free, CD-quality sound for your computer-based IP and audio applications.

With the GN 8110, there's no software to install. Simply plug the GN Netcom headset into the adapter, and plug the adapter into the computer's USB port. The result is clean, distortion-free digital audio without any fuss. The adapter is available in two variants: with Quick Disconnect (QD) for our corded headsets or an RJ9 plug for use with our wireless headsets.



GN 8110 QD



GN 8110 RJ9

www.gnnetcom.com

GN Netcom

GN 8110

| Features | Benefits |
|---|--|
| Industry-certified | No compatibility issues. Officially certified for use with Windows® operating systems. Also compatible with Mac operating systems 9.0.4 or greater. In short, the GN 8110 works with virtually any computer. |
| Plug & play convenience | Absolutely no software to install. The GN 8110 is as easy to install as it is to use. |
| Compatible with all USB-capable computers | Eliminate noise and sound-card compatibility problems. |
| Available in two variants: <ul style="list-style-type: none">▪ Quick Disconnect (QD)▪ RJ9 plug | Works with most GN Netcom headsets, both corded and wireless. |

| Technical specifications | |
|--------------------------|--|
| USB interface | Compliant with USB 1.1 General and Audio Class specifications. |

| Audio specifications | |
|------------------------------------|------------------------|
| Sampling rates | 6.4 to 48 kHz. |
| Signal-to-noise | -92 dB. |
| Speaker channel frequency response | 20-20,000 Hz monaural. |

| General specifications | |
|------------------------|---|
| Headset cord | 0.9-1.8 m (3-6 ft) coiled cord with GN Netcom Quick Disconnect (QD) or RJ9 plug. |
| USB cable | 0.6 m (2 ft). |
| Case material | ABS plastic. |
| Case dimensions | 107 mm (4.2") X 25 mm (1.0") x 22 mm (.87"). |
| Weight | 70g / 2.5 oz. (cable adaptor only). |
| Power | Supplied by USB port. Current draw: < 10 mA power-down mode; approx.100 mA operating. |
| Safety | UL 1950, FCC Part 15 Class A/B, CE. |